

Introducing a revolutionary new tile product designed to meet all your garage and concrete floor covering needs.

Constructed and fashioned with you in mind, Dynotile represents the ultimate marriage of intelligent engineering with aesthetically pleasing design. The result: an extremely durable tile with a sophisticated showroom appearance that acts as a layer of insulation, keeping your feet and stored items away from the harsh properties of the concrete below. Dynotile can give a fresh, clean look to any room, quickly and easily, making it not only an ideal covering for any garage, but also any exercise, basement or hobby room, industrial warehouse, expo or tradeshow floor, outdoor deck or even an airplane hanger.

You stand. We'll do the rest.

Dynotile is made of a special polymer plastic that provides you with a unique blend of strength and shock absorption properties. Our softer construction material is more forgiving on the feet and knees meaning you get a floor that is very comfortable to stand on. Yet, this unique polymer blend is also extremely tough, effectively resisting stains, fire, bacteria, chemicals, and the harmful effects of UV rays including fading and cracking.




The 'Do-it-yourself' Tile

Dynotile does not require a professional to install and our unique Overlock technology makes installation go extremely fast. Simply align the pegs and loops, press firmly and you're onto the next tile. No glue. No adhesive. No floor surface preparation of any kind. Simply snap and go and in just a few hours you'll have a great looking floor that can be either permanent or temporary.

A Perfect Fit

Dynotile has been superbly engineered and is the only tile on the market featuring our patent pending Overlock™ technology. This means you not only get tiles that fit together extremely tight, but they actually overlap to create a near impenetrable seam. Dirt and spills tend to stay on top of the tiles and do not seep down between the seams where connection points are typically weak. Cleanups are quick and easy so you can keep your garage smelling fresh with no lingering odors.

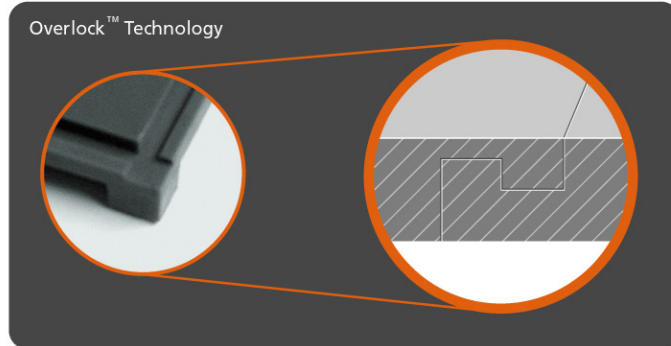


Design Specifications

Size	12 x 12 x .375
Connection	Overlock Interlocking Overlap
Material	Specially Formulated Polymer*

*chemically resistant per ASTM 925


Installation Time Chart

	Hours (1 person)
(One Car Garage)	2
	3
	4

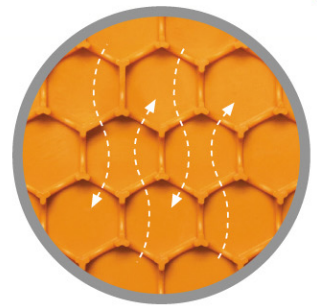

Bring it on!

Underneath, Dynotile utilizes a unique honeycomb structure that provides the added strength needed to withstand those extra heavy loads. For floors that are cracked or damaged, Dynotile will hide any imperfections giving you a smooth flooring surface with a strong, manageable finish. The sides of the honeycomb also have radius tunnels that encourage airflow beneath the tiles. This unique design feature allows any trapped moisture that may come up through your concrete floor to evaporate.

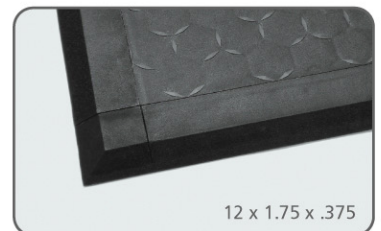

Use our specially designed edging to create a smooth transition between rooms or to the outdoors